

# Tilt Latch Repair – Welded

- Tools Needed**
- Small tipped screw driver or
  - Putty knife



Activate Tilt Latch

Open Sash


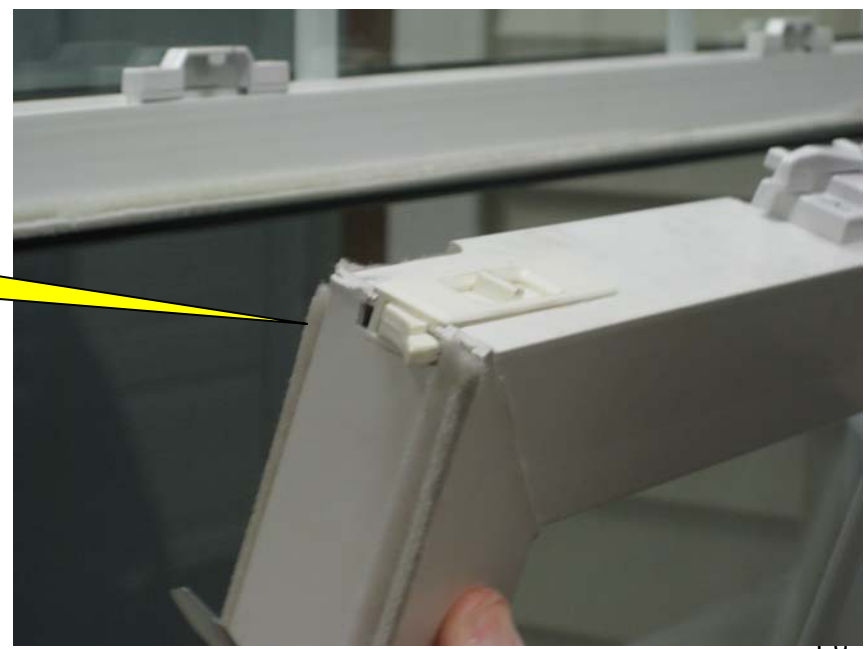


Fig. 1


## Tilt Latch Repair – Welded

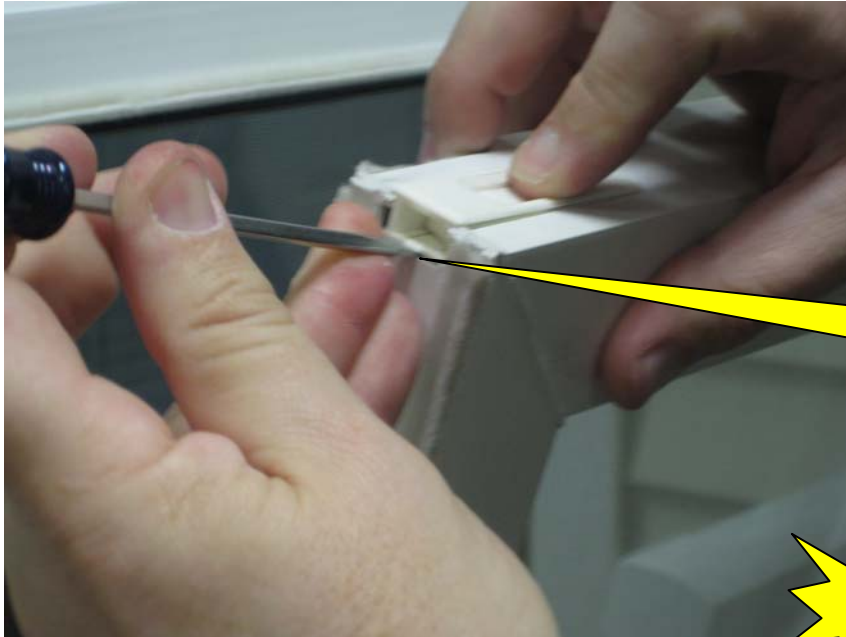


Release latch with screwdriver by depressing locking tab on latch

OR


Release latch with putty knife by depressing locking tab on latch

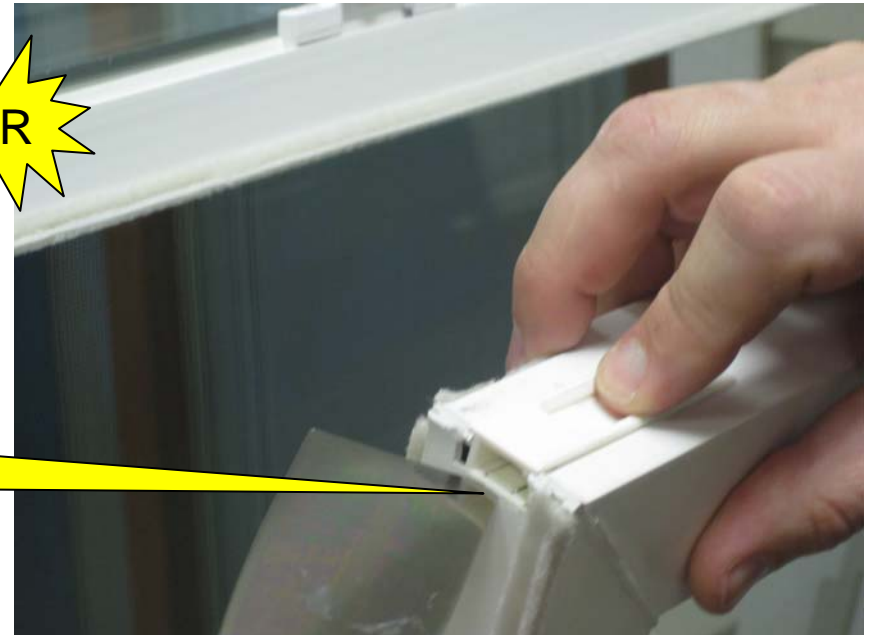

# Tilt Latch Repair - Welded

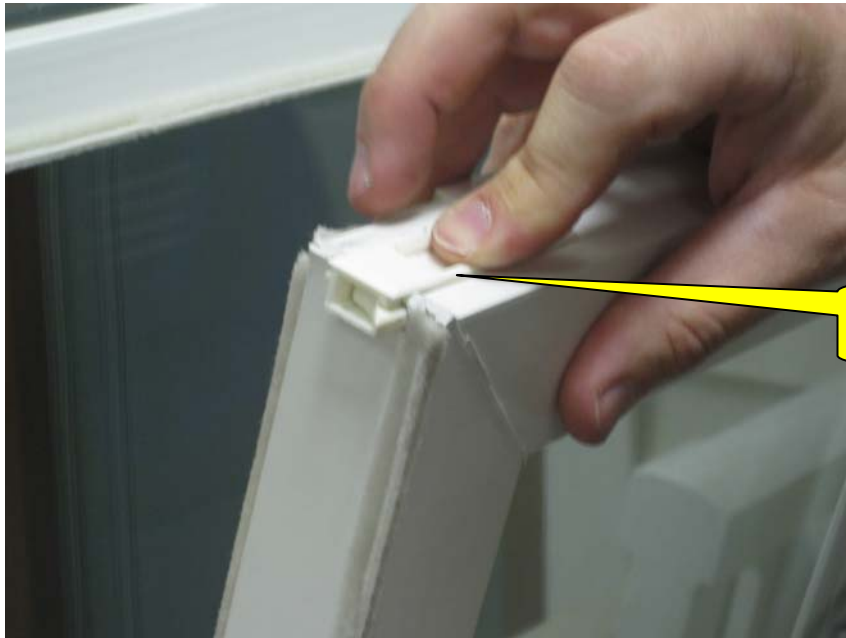


Remove latch by sliding out from sash

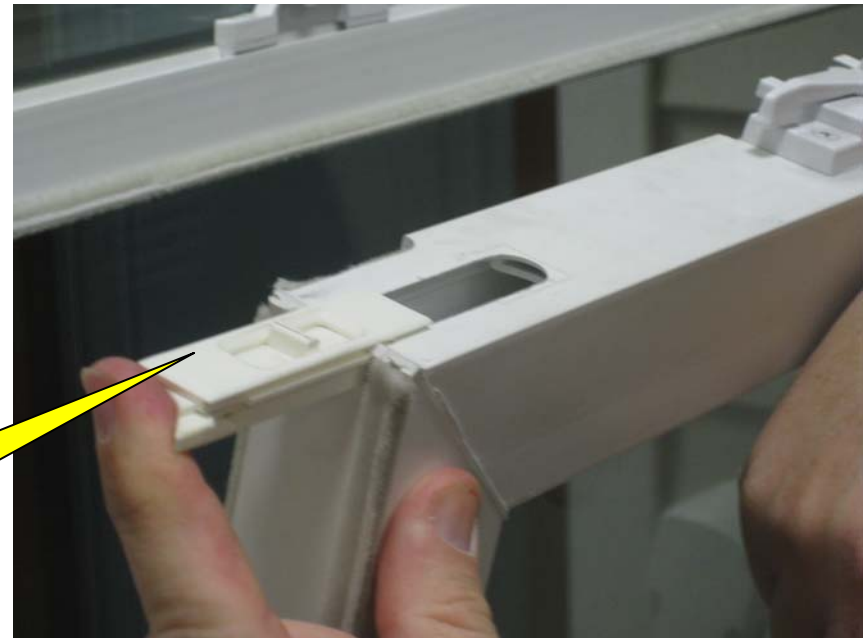

Slide in new latch

# Tilt Latch Repair – Welded

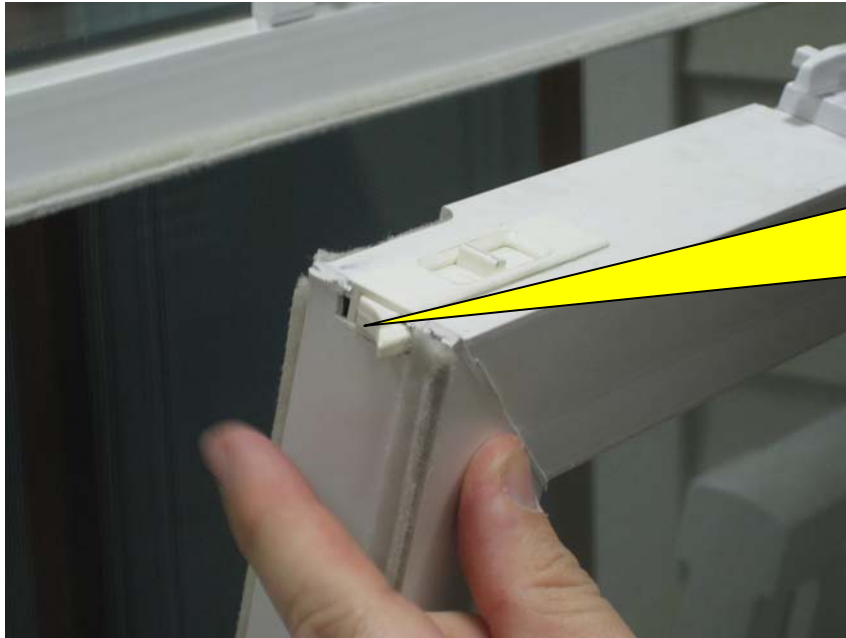

- To secure new latch, latch tab must lock into place
- Activate latch to ensure side to side movement

- Return sash to secured position
- Ensure latch engages with frame

