


Replace Lock

Tools Needed

- #2 Phillips screw driver or a powerdriver with bit

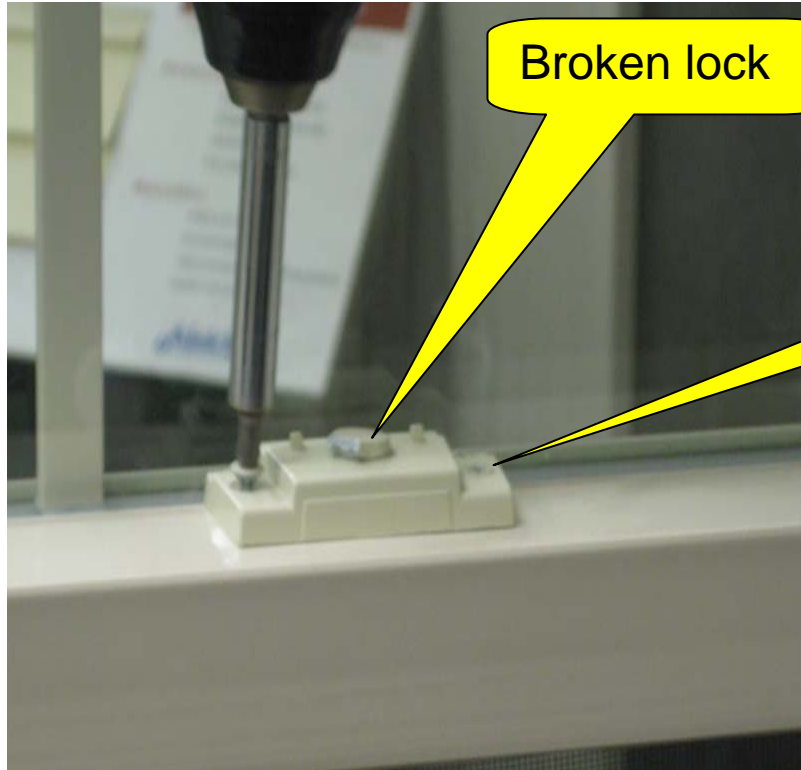

Broken lock

Remove both screws




Take out the lock and screws

Replace Lock



- Align new lock and two screws to existing holes in sash
- Make sure lock is square with keeper

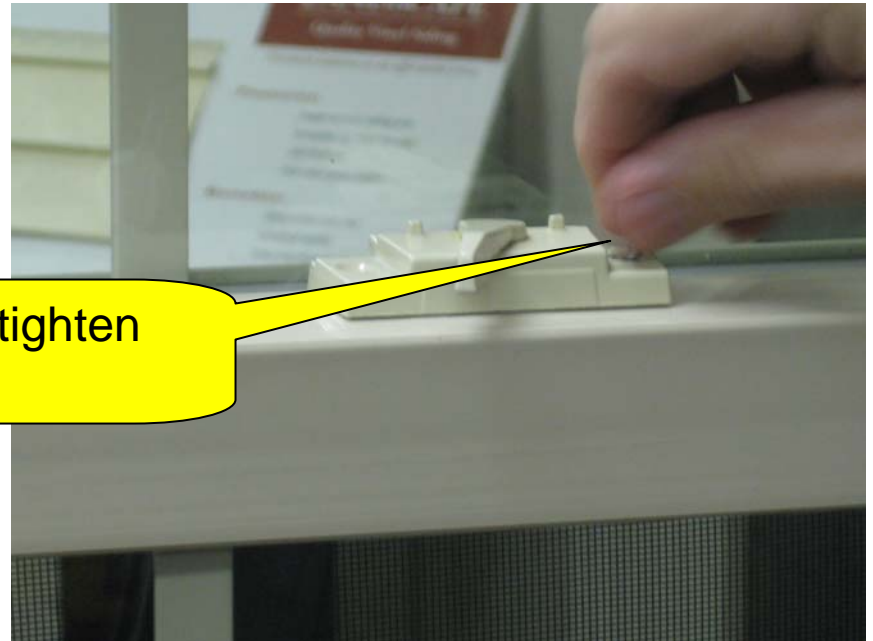

Hand start and tighten the screws

Replace Lock



- Hand tighten with screwdriver
- Do not overtighten

Operate lock and ensure proper operation

